


CODE: **AWO278 v.1.0/I**
 NAME: **Enclosure 17/TRP80/PAR/SP/G3**

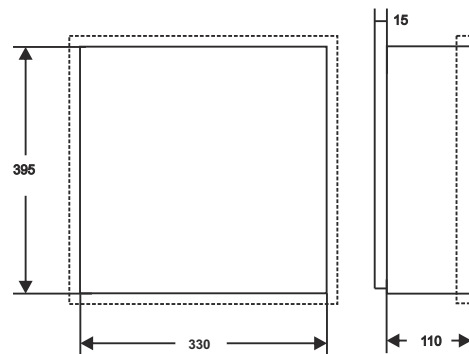

APPLICATION

7Ah:

1) (728 ULT, E55, E65, SP4000, 5500, 6000, 7000, EV048, 192, HD, MG5000, 5050, PS17, ACM12) + 4x ZX8 (6xZX4, APR3-ADM2, APR3- HUB2, PGM4)

17Ah:

1) (728 ULT, E55, E65, SP4000, 5500, 6000, 7000, EV048, 192, HD, MG5000, 5050, PS17, ACM12) + 2x ZX8 (5x ZX4, APR3-ADM2, HUB, PGM4)

TECHNICAL PARAMETERS

Dimensions:	internal: W=330, H=395, D=110 external: W1=335, H1=400, D1=115+15 [mm, +/-2]
Weight net/gross:	5,42kg / 5,71kg [+/-0,1kg]
Battery space:	17Ah/12V Sealed Lead Acid (SLA)
Transformer	TRP 80VA/16V/18V/20V in the case of PC/ABS in class UL94- V0, IP20
Power supply:	230V/AC (-15%/+10%), 50Hz, 400mA (max.)
Power supply output:	U1=16V/AC or U2=18V/AC or U3=20V/AC(-5%, +15%), I1=5,0A or I2=4,5A or I3=4,0A (max)
Operating environment:	2nd environmental class, -10°C+ 40°C
Material description:	sheet steel DC01, thickness: 1,0mm, corrosion protection, color: RAL 9003
Destination:	indoor
Tamper protection:	2 x microswitch: opening of the enclosure, 0,5A@50V/DC max. NC/NO - normally closed contacts / normally open
Closing:	screwed x 2
Notes:	distance from wall (mounting surface) - 15mm, "C"-shaped doors and the bottom of the casing, no hinges
Certification, declaration:	CE, RoHS in accordance with the EN50131 standard, Grade 3