

**VIEMC\*P111V**



**VIEMC\*P111AV**



**VIEMC\*P111VT**



**VIEMC\*P111VP**



**Video (+ audio) Transceivers**

**Installation Manual**

**SSAM INTERNATIONAL**


The whole world of security [www.ssam.com](http://www.ssam.com)

Copyright by SSAM International V20030710


## Features:

- Transmits an audio and a full motion video signal (audio only VISEMC\*P111AV) up to 600 meters (b/w 600m, colour 400m)
- Eliminates Coaxial Cable.
- Passive, No power required.
- Perfect if you want to install the products at a location with an existing CAT-5 cabling.


### VISEMC\*P111V (1xBNC to 1xRJ45)

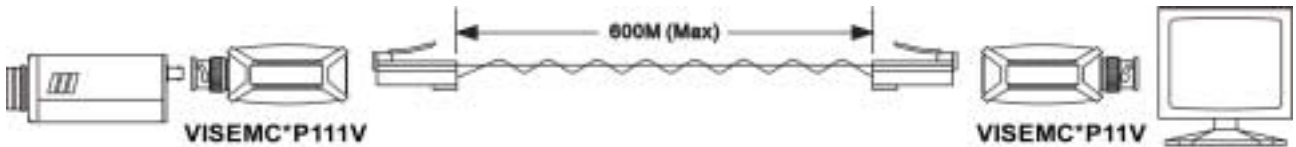

Front/Rear of VISEMC\*P111V

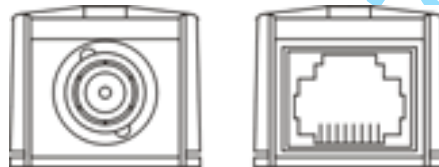

### VISEMC\*P111VP (1xBNC to 1xRJ45 with power)

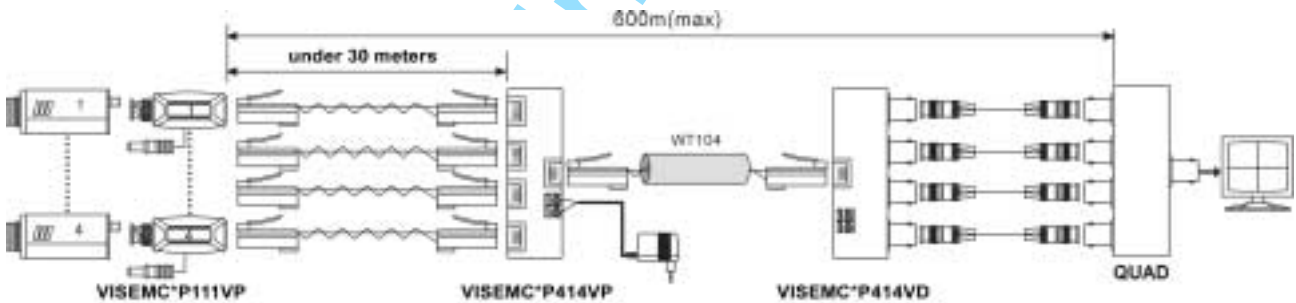


VISEMC\*P111VP with VISEMC\*P414VP and VISEMC\*P414VD

Front/Rear of VISEMC\*P111VP




## VIEMC\*P111AV (1xBNC to 1xRJ45 with audio)

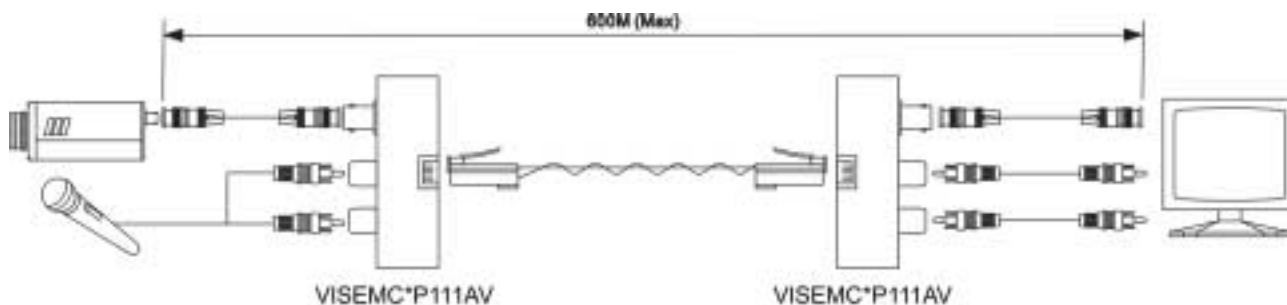


Front/Rear of VIEMC\*P111AV



## VIEMC\*P111VT (1xBNC to terminals)

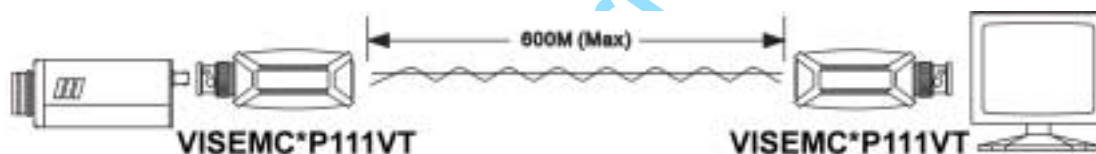

Front/Rear of VIEMC\*P111VT

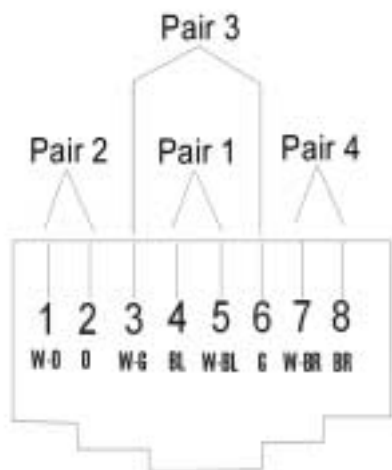

<b>RJ-45 JACK</b>	
PIN	Colour
1	white - orange
2	orange
3	white - green
4	blue
5	white - blue
6	green
7	white - brown
8	brown

	<b>P111V</b>	<b>P111VT</b>	<b>P111AV</b>	<b>P111VP</b>
VIDEO INPUTS (BNC)	1	1	1	1
INPUT TYPE	1Vpp, 75 Ohms	1Vpp, 75 Ohms	1Vpp, 75 Ohms	1Vpp, 75 Ohms
AUDIO INPUTS (RCA)	X	X	2 way	X
INPUT TYPE	X	X	2Vpp	X
RJ-45 OUTPUTS	1	Terminals	1	1
VIDEO BANDWIDTH	12 MHz			
MAX. DISTANCE	600 meters (b/w), 400 meters (colour)			
RECOMMENDED CABLE	Twisted Pair CAT5 (AWG24)			
POWER SUPPLY FOR CAMERA	X	X	X	YES
DIMENSIONS (WxHxD)	69x22x25 [mm]	69x22x25 [mm]	110x24x78 [mm]	69x22x25 [mm]

**SSAM INTERNATIONAL**  
The whole world of security [www.ssam.com](http://www.ssam.com)

**Copyright by SSAM International**