




AVN807A MEGAPIXEL IR NETWORK CAMERA



FEATURES

- Easy network setup with your iPhone / iPad
- Megapixel SONY High Resolution image sensor, allowing users to notice minor details more easily
- ONVIF standard supported to simplify system integration
- External alarm I/O device connection
- Memory storage built-in for video recording
- IR LED built-in for night surveillance with effective range up to 15 meters
- Remote Surveillance
 - Fully compatibility on iPhone & iPad, and Internet Explorer® on Windows® operating system

Dimensions (mm)

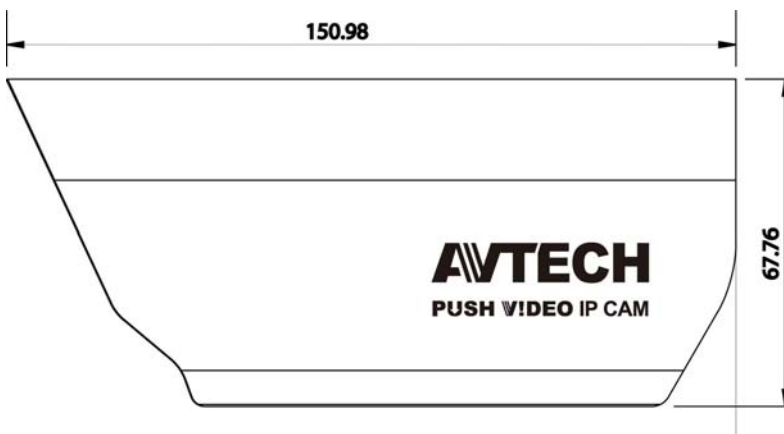

* Dimensional tolerance: (± 5 mm)



SPECIFICATIONS

■ Network	
Network Compression	H.264 / MPEG4 / MJPEG
Multiple Video Streaming (Encode Modes, IPS, Resolution)	3 (H.264, MJPEG, MPEG4)
LAN Port	YES
LAN Speed	10/100 Based-T Ethernet
Supported Protocols	DDNS, PPPoE, DHCP, NTP, SNTP, TCP/IP, ICMP, SMTP, FTP, HTTP, RTP, RTSP, UPnP
Frame Rate	NTSC:30, PAL:25
Number of Online Users	10
Security	Multiple user access levels with password
Remote Access	(1) Internet Explorer on Windows operating system (2) EagleEyes on iPhone, iPad & Android mobile devices
■ Camera	
Image Sensor	1/3" HR image sensor
Video Resolution	SXGA, SXVGA, 720P, VGA, QVGA
Min Illumination	0.1 Lux / F1.5, 0 Lux (IR LED ON)
S/N Ratio	More than 48dB (AGC off)
Lens	f3.8mm / F1.5
Viewing Angle	80.4°(Diagonal)
IR LED	35 Uints
IR Effective Range	Up to 15 meters
White Balance	ATW
AGC	Auto
IRIS Mode	AES
External Alarm I/O	YES
Memory storage	10MB (Built-in)
Power Source (±10%)	12V / 1A
Operating Temperature	-20°C ~40°C
■ Others	
Mobile Surveillance	iPhone / Android mobile device
Motion Detection	YES
Event Notification	FTP / Email / Push Video
RTC (real-time clock)	YES
Digital Pan / Tilt / Zoom	YES
Minimum Web Browsing Requirements	<ul style="list-style-type: none"> • Pentium 4 CPU 1.3 GHz or higher, or equivalent AMD • 256 MB RAM • AGP graphics card, Direct Draw, 32MB RAM • Windows 7, Vista & XP, DirectX 9.0 or later • Internet Explorer 7.x or later

* The specifications are subject to change without notice.

** Dimensional tolerance: (± 5mm)